




<b>Bördelenden</b> <b>Welding Collars</b> passend für Losflansche Typ 02 For Pressed Slip-On Flanges Type 02	<b>DIN 2642 PN 6</b>
---	----------------------

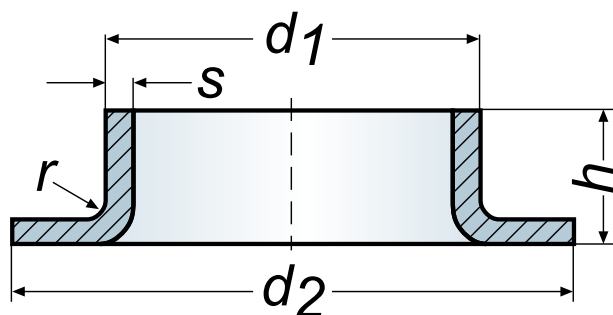

Material: P235G1-TH St. 35.8/1  
roh, schwarz

Rohr- / Außendurchmesser	Wanddicke	Wanddicken Baureihe	Außendurchmesser	Radius	Baulänge	Stückgewicht kg
$d_1$	$s$		$d_2$	$r$	$h$	
21,3	2,0	2	40	3	20	0,030
26,9	2,3	2	50	3	20	0,030
33,7	2,6	2	60	4	20	0,040
38,0	2,6	2	70	4	20	0,060
42,4	2,6	2	70	4	25	0,060
44,5	2,6	2	80	4	25	0,070
48,3	2,6	2	80	4	25	0,070
57,0	2,9	2	90	5	30	0,090
60,3	2,9	2	90	5	30	0,120
76,1	2,9	2	110	5	30	0,150
88,9	3,2	2	128	5	30	0,200
108,0	3,6	2	148	5	35	0,320
114,3	3,6	2	148	5	35	0,340
133,0	4,0	2	178	5	40	0,500
139,7	4,0	2	178	5	40	0,530
159,0	4,5	2	202	5	40	0,680
168,3	4,5	2	202	5	40	0,720
219,1	6,3	2	258	5	40	1,320
267,0	6,3	2	312	5	50	1,970
273,0	6,3	2	312	5	50	2,070
323,9	7,1	2	365	5	60	3,330
355,6	8,0	2	415	6	60	4,110
368,0	8,0	2	415	6	60	4,260
406,0	8,8	2	465	6	60	5,180

Sonderabmessungen und Starkwandige Einschweißbogen - auf Anfrage