




**Caps**  
**Kappen**  
 nach ASME / ANSI B 16.9

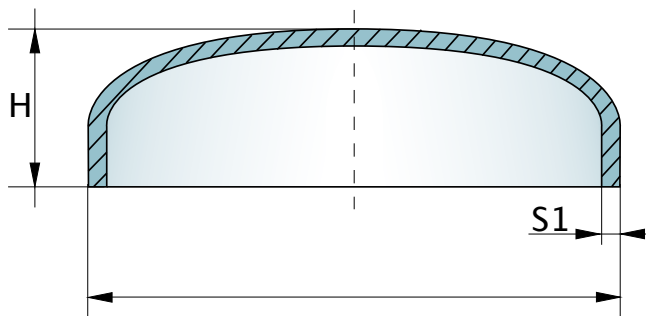

Outside Diameter Außendurchmesser		Wall Thickness Wanddicke	Identification Kennzeichnung	Length Bauhöhe	Kilos/Piece kg/Stück
inch	mm	mm		mm	
<i>D</i>	<i>D</i>	<i>S</i> <sub>1</sub>		<i>H</i>	
1/2"	21,3	2,77	STD	25,4	0,030
		3,73	XS		0,040
		4,78	SCH 160		0,060
3/4"	26,7	2,87	STD	25,4	0,060
		3,91	XS		0,070
1"	33,4	3,38	STD	38,1	0,100
		4,55	XS		0,130
		6,35	SCH 160		0,150
1 1/4"	42,2	3,56	STD	38,1	0,140
		4,85	XS		0,180
1 1/2"	48,3	3,68	STD	38,1	0,170
		5,08	XS		0,220
		7,14	SCH 160		0,300
		10,16	XXS		0,350
2"	60,3	3,91	STD	38,1	0,230
		5,54	XS		0,300
		8,74	SCH 160		0,550
		11,07	XXS		0,600
2 1/2"	73,0	5,16	STD	38,1	0,370
		7,01	XS		0,460
		9,52	SCH 160		0,900
3"	88,9	5,49	STD	50,8	0,640
		7,62	XS		0,840
		11,13	SCH 160		1,450
4"	114,3	6,02	STD	63,5	1,160
		8,56	XS		1,550
		13,49	SCH 160		2,750
5"	141,3	6,55	STD	76,2	1,910
		9,52	XS		2,610
6"	168,3	7,11	STD	88,9	2,910
		10,97	XS		4,190
8"	219,1	6,35	SCH 20	101,6	4,500
		8,18	STD		5,500
		10,31	SCH 60		7,000
		12,70	XS		7,400
10"	273,0	9,27	STD	127,0	9,080
		12,70	XS		11,900
12"	323,8	9,52	STD	152,4	13,400
		12,70	XS		17,300
14"	355,6	9,52	STD	165,1	16,000
		12,70	XS		20,800
16"	406,4	9,52	STD	177,8	20,100
		12,70	XS		26,100
		16,66	SCH 60		40,750
18"	457,2	9,52	STD	203,2	25,900
		12,70	XS		33,900
		19,05	SCH 60		66,000
20"	508,0	9,52	STD	228,6	32,500
		12,70	XS		42,600
24"	609,6	9,52	STD	266,7	46,300
		12,70	XS		60,800