
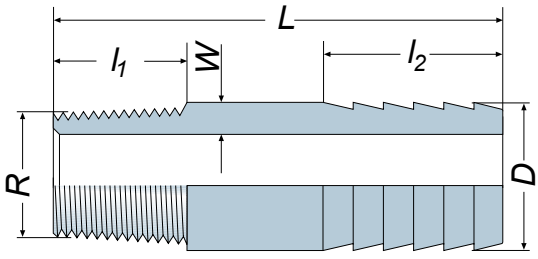


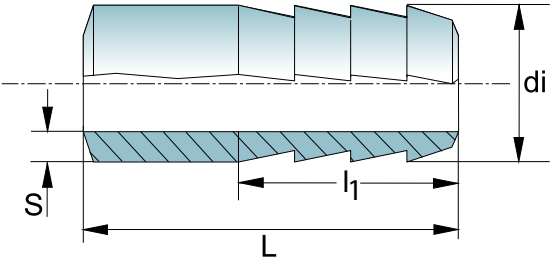

Gewindeschlauchnippel Hose Nipple Thread End mit kegeligem Whitworth-Rohrgewinde nach DIN 2999							
					Edelstahl		
DN	Gewinde Kurzzeichen	Außen-durchmesser	Innen-durchmesser	Gesamtlänge	Gewindelänge	Tüllenlänge	Stückgewicht kg
	R	D	d	L	l ₁	l ₂	
6	1/8"	10,2	6,5	70	8	30	0,026
8	1/4"	13,5	8,9	70	11	30	0,040
10	3/8"	17,2	12,6	70	12	30	0,040
15	1/2"	21,3	16,1	70	15	30	0,069
20	3/4"	26,9	21,7	70	17	30	0,080
25	1"	33,7	27,3	70	20	30	0,130
32	1 1/4"	42,4	36,0	70	22	30	0,176
40	1 1/2"	48,3	41,9	70	22	30	0,180
50	2"	60,3	53,1	100	26	30	0,364
65	2 1/2"	76,1	68,7	120	32	38	0,470
80	3"	88,9	80,5	120	35	38	0,560
100	4"	114,3	105,6	150	42	44	1,140

Anschweißschlauchnippel Welded Hose Nipple mit Anschweißende						
					Edelstahl	
DN	Zoll	Außen-durchmesser	Wanddicke	Tüllenlänge	Gesamtlänge	Stückgewicht kg
		di	S	l ₁		
6	1/8"	10,2	2	30	40	0,014
8	1/4"	13,5	2,3	30	40	0,020
10	3/8"	17,2	2,3	30	50	0,042
15	1/2"	21,3	2,60	30	70	0,070
20	3/4"	26,9	2,60	30	70	0,101
25	1"	33,7	3,20	30	70	0,132
32	1 1/4"	42,4	3,20	30	70	0,190
40	1 1/2"	48,3	3,20	30	70	0,220
50	2"	60,3	3,60	30	70	0,330
65	2 1/2"	76,1	3,60	38	70	0,440
80	3"	88,9	4,00	38	70	0,560

20