




**Sechskant - Einschraubschlauchnippel**  
**Hexagonal Hose Nipple**  
 mit konischem Whitworth-Rohrgewinde nach DIN 2999

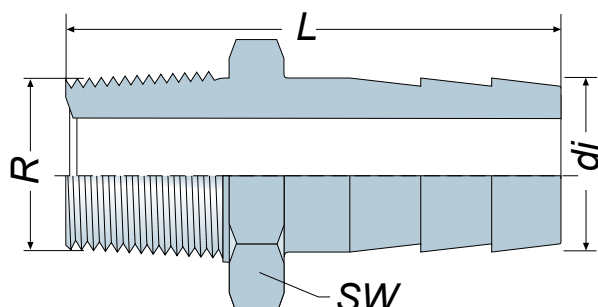

Edelstahl

DN	Gewinde Kurzzeichen	Schlauch	Länge	Schlüsselweite	Stückgewicht kg
	R	di	L	SW	
6	1/8"	2,5	30,0	12	0,012
		4,0	30,0		
		6,0	30,0		
		11,0	35,0		
8	1/4"	4,0	35,0	14	0,024
		6,0	40,0		
		9,0	40,0		
		11,0	42,0		
10	3/8"	6,0	42,0	19	0,041
		9,0	42,0		
		11,0	45,0		
		13,0	45,0		
15	1/2"	6,0	45,0	22	0,062
		9,0	45,0		
		11,0	45,0		
		13,0	50,0		
20	3/4"	9,0	50,0	27	0,085
		11,0	50,0		
		13,0	52,0		
		16,0	55,0		
25	1"	13,0	55,0	36	0,145
		16,0	60		
		19,0	65		
		25,0	70		
32	1 1/4"	16,0	65	46	0,209
		19,0	70		
		25,0	75,0		
		30,0	80		
40	1 1/2"	19,0	75	50	0,266
		25,0	80		
		30,0	85		
		38,0	90		
50	2"	25,0	85	65	0,45
		30,0	90		
		38,0	95		
		50,0	100		