





Sechskant - Doppelnippel
Cust Hexagon Nipple
mit kegeligem Whitworth-Rohrgewinde nach DIN 2999

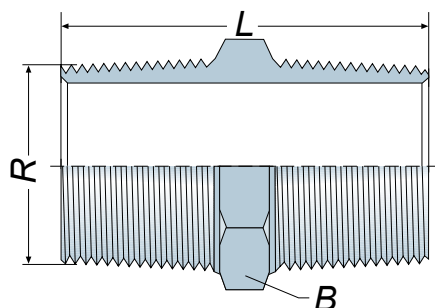

Edelstahl

DN	Gewindekurzzeichen	Länge	Schlüsselweite	Stückgewicht kg
	R	L	B	
6	1/8"	22	12	0,015
8	1/4"	24	14	0,028
10	3/8"	28	19	0,018
15	1/2"	34	22	0,040
20	3/4"	40	30	0,053
25	1"	46	36	0,120
32	1 1/4"	52	46	0,174
40	1 1/2"	54	50	0,225
50	2"	62	65	0,292
65	2 1/2"	70	80	0,494
80	3"	78	90	0,633
100	4"	94	120	1,140

Rohrnippel DIN 2982
Threaded Pipe Nipple DIN 2982
mit zylindrischem Whitworth-Rohrgewinde nach DIN / ISO 228



Edelstahl

DN	Gewindekurzzeichen	Länge	Stückgewicht kg
	G	L	
6	1/8"	16	0,004
8	1/4"	18	0,006
10	3/8"	22	0,010
15	1/2"	25	0,019
20	3/4"	30	0,020
25	1"	35	0,043
32	1 1/4"	38	0,061
40	1 1/2"	38	0,080
50	2"	45	0,120
65	2 1/2"	55	0,180
80	3"	60	0,250
100	3"	70	0,370