




**Reduzierdoppelnippel 6-kt./8-kt.**  
**Reducing Hexagonal Nipple**  
 mit kegeligem Whitworth-Rohrgewinde  
 nach DIN 2999 ähnlich EN 10241 (DIN 2990)

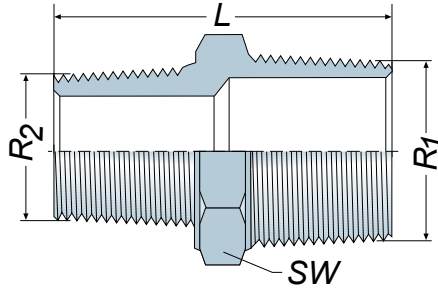

Edelstahl

Gewindekurzzeichen		Gesamtlänge	Schlüsselweite	Stückgewicht kg
$R_1$	$R_2$	$L$	$SW$	
1/4"	1/8"	25,0	14	0,012
3/8"	1/8"	25,0	19	0,018
	1/4"	29,0	19	0,018
1/2"	1/8"	30,0	22	0,040
	1/4"	33,0	22	0,040
	3/8"	33,5	22	0,040
3/4"	1/4"	35,0	30	0,053
	3/8"	37,0	30	0,053
	1/2"	40,5	30	0,053
1"	1/4"	40,0	36	0,120
	3/8"	40,5	36	0,120
	1/2"	44,0	36	0,120
	3/4"	45,5	36	0,120
1 1/4"	1/4"			0,174
	1/2"	48,0	46	0,174
	3/4"	49,5	46	0,174
	1"	52,0	46	0,174
1 1/2"	1/2"	48,0	50	0,225
	3/4"	50,0	50	0,225
	1"	42,0	50	0,225
	1 1/4"	54,0	50	0,225
2"	1/2"			0,292
	3/4"			0,292
	1"	59,0	65	0,292
	1 1/4"	62,0	65	0,292
	1 1/2"	62,0	65	0,292
2 1/2"	1"			0,494
	1 1/4"	65,0	80	0,494
	1 1/2"	65,0	80	0,494
	2"	73,0	80	0,494
3"	1 1/4"			0,633
	1 1/2"			0,633
	2"	78,0	90	0,633
	2 1/2"	82,0	90	0,633
4"	2"			1,140
	2 1/2"			1,140
	3"			1,140